

SENTINEL[®]

SHINGLES

*"Basic Value
In A 3-Tab Shingle"*



SENTINEL SPECIFICATIONS:

Sentinel Shingles Midweight 3-tab Shingle

Basic Value...

Currently protects over one million homes nationwide



Quality Construction...

Strong Micro Weave[®] Core for long life and durability

Peace of Mind...

20-Year Ltd. Warranty

Layers of a Shingle

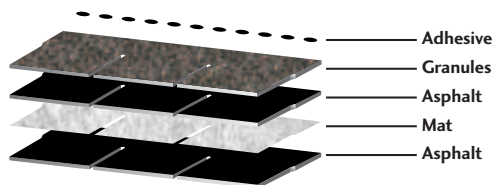

12" X 36" (Imperial Size)
336 X 1000mm (Metric)

Sentinel

- 20-Year Ltd. Warranty
- 60 mph Ltd. Wind Warranty
- Fiberglass Asphalt Construction
- Class A Rating from UL
- Passes UL 997 Wind Test
- ASTM D3018 Type 1
- ASTM D3161 Type 1
- ASTM D3462 (Available from select plants)*
- Approx. 80 Pieces/Square (Imperial)
- Approx. 65 Pieces/Square (Metric)
- 3 Bundles/Square (Imperial)
- Approx. 3.1 M² per bundle
- Approx. 320 Nails/Square (Imperial)
- Approx. 260 Nails/Square (Metric)
- 5" Exposure (Imperial)
- 5 $\frac{1}{8}$ " Exposure (Metric)

* See Ltd. Warranty for complete coverage and restrictions

** This product is manufactured to meet or exceed ASTM D3462; values from subsequent testing may vary depending on storage conditions